



ED2-72 SERIES ED2SYS-72 SERIES

HEATED DISPLAY SYSTEMS



ED2-72



ED2SYS-72



- HALO HEAT ... a controlled, uniform heat source that gently holds and surrounds food for better appearance, taste, and longer holding life.
- Holds and displays hot food fresh and moist for hours — without adding water.
- Expandable system to meet your specific requirements.
- Matches profile of leading refrigerated display case.
- **HOT DISPLAY CASE**
 - Curved glass styling.
 - Displays hot food without condensation on glass.
 - Thermostatically controlled heat source radiates from the base of the display case in multiple heat zones.
 - Overhead light zones with shatterproof coated bulbs.
 - Holds a full range of standard (gastronorm) pan sizes, full-size or half-size sheet pans.
 - Tempered sliding glass doors reflect heat back into the products and mirror the display to enhance merchandising effect.
- **DECORATOR BASE**
 - Standard black painted front and end panels.
- **SELF-SERVICE HOT DISPLAY**
 - Customer self-service opening is available on right side, left side, or across the full length of case.
 - Front mounted heat-guard provides customer protection.

The display case is constructed of 18 gauge, non-magnetic stainless steel. A tempered glass front encloses the display case and can be lifted to a 90 degree angle for easy cleaning. Removable, sliding glass doors on the operator side are included. Sliding door tracks have a "clean sweep" cutout allowing for easy cleaning and crumb removal. Framed end glass with rubber gasket material protects glass edges from chipping and breakage. The base is divided into two (2) individually managed heat zones with each zone controlled by a separate thermostat with a range of 1 through 10 and heat-on indicator light. Overhead lights are controlled by ON/OFF switches in two (2) light zones. Two (2) 125V plug outlets are available as an option on 120/208-240V units only. Counter-top display cases include one set of 4" (102mm) legs.

- | |
|--|
| <input type="checkbox"/> ED2-72 - 72" (1829mm) length |
| <input type="checkbox"/> ED2SYS-72 - 72" (1829mm) length, with base |
| <input type="checkbox"/> ED2-72/P - 72" (1829mm) length, 71-5/16" (1811mm) self-service opening across full length of case front |
| <input type="checkbox"/> ED2SYS-72/P - 72" (1829mm) length, with base, 71-5/16" (1811mm) self-service opening across full length of case front |
| <input type="checkbox"/> ED2-72/PL - 72" (1829mm) length, 23-3/4" (603mm) self-service opening on left side of case front |
| <input type="checkbox"/> ED2SYS-72/PL - 72" (1829mm) length, 23-3/4" (603mm) with base, self-service opening on left side of case front |
| <input type="checkbox"/> ED2-72/PR - 72" (1829mm) length, 23-3/4" (603mm) self-service opening on right side of case front |
| <input type="checkbox"/> ED2SYS-72/PR - 72" (1829mm) length, with base, 23-3/4" (603mm) self-service opening on right side of case front |



FACTORY INSTALLED OPTIONS


- The system base is not sold as a separate item. Order the full ED2SYS model to receive the base.
- Panel Color Choices
 - ➔ Specify color choice:
 - ☐ Black, standard
 - ☐ Stainless Steel, optional
 - ☐ Custom Color, optional



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY


www.alto-shaam.com



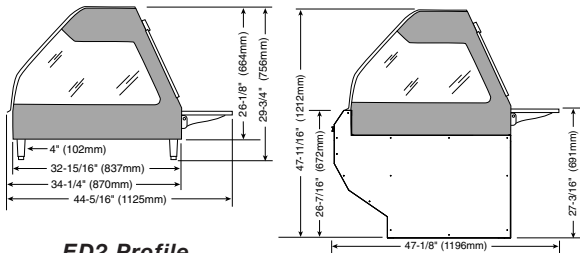

ED2 Profile

ED2SYS Profile

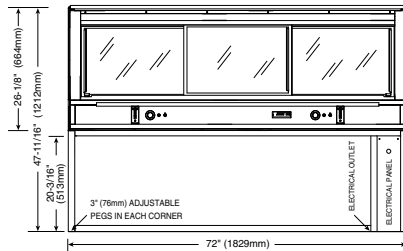

ED2SYS-72

DIMENSIONS (H X W X D)

EXTERIOR, COUNTER-TOP MODEL WITH LEGS:

29-3/4" x 72" x 44-5/16" (756mm x 1829mm x 1125mm)


EXTERIOR, WITH BASE:

47-11/16" x 72" x 47-1/8" (1212mm x 1829mm x 1196mm)

WELL DIMENSIONS (W X L X D):

27-3/16" x 69-5/16" x 4-1/2" (690mm x 1760mm x 114mm)

ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	
120/208-240 (UL)	1	50/60	18.75	4.6	NEMA L14-30P 30A, 250V PLUG 
at 208	1	50/60	19.0	4.5	
at 240	1	50/60	19.0	4.5	
230 (CE)	1	50/60	18.3	4.2	BARE END, NO PLUG
230	1	50/60	18.4	4.2	
380-415	3	50/60	10.5	4.4	BARE END, NO PLUG

PAN CONFIGURATION*

PAN SIZE	DIMENSIONS	QTY.
FULL-SIZE & ONE-THIRD**:	12" x 20" x 2-1/2" (GN 1/1)	5
	12" x 6" x 2-1/2" (GN 1/3)	5
HALF-SIZE & ONE-THIRD**:	12" x 10" x 2-1/2" (GN 1/2)	10
	12" x 6" x 2-1/2" (GN 1/3)	5
FULL-SIZE SHEET PANS:	18" x 26" x 1"	3
MAX. CAPACITY/VOLUME:	80 lbs (36 kg)	
	50 qts (60 L)	

* Pans are not included with display case.

** Will also accept 4" (100mm) deep pans.

SPECIFICATIONS

- Ten (10) overhead lights with two (2) light zones.
- Two (2) base heat zones with two (2) adjustable thermostats with a range of 1 through 10, and two (2) heat-on indicator lights.
- Three (3) tinted, reflective, tempered glass sliding doors on operator side.
- One (1) 10" x 60" (254mm x 1524mm) operator-side work shelf.
- Self-serve model ED2-72/P has a self-serve pan insert 26-7/16" x 69-3/16" x 2" (672mm x 1757mm x 51mm) and includes three (3) Wire Pan Grids.
- Self-serve models ED2-72/PL and ED2-72/PR have a self-serve pan insert 21-5/8" x 26-7/16" x 2" (549mm x 672mm x 51mm) and includes one (1) Wire Pan Grid.

INSTALLATION REQUIREMENTS

Display case must be installed level. The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.

WEIGHT

MODEL	NET	SHIP
ED2-72	419 lb (190 kg)	465 lb (210 kg)
ED2SYS-72	621 lb (282 kg)	690 lb (313 kg)
ED2-72/P	450 lb (204 kg)	500 lb (227 kg)
ED2SYS-72/P	661 lb (299 kg)	735 lb (345 kg)
ED2-72/PL; /PR	432 lb (197 kg)	480 lb (295 kg)
ED2SYS-72/PL; /PR	643 lb (318 kg)	715 lb (363 kg)
CRATED DIMENSIONS (EST.): H X W X D		
ED2-72: 45" x 85" x 55" (1143mm x 2159mm x 1397mm)		
ED2SYS-72: 65" x 85" x 55" (1651mm x 2159mm x 1397mm)		

OPTIONS & ACCESSORIES

<input type="checkbox"/> BUTTING KIT	5008523	<input type="checkbox"/> PANEL KIT, SYSTEM	
<input type="checkbox"/> CARVING STATION	5001874	<input type="checkbox"/> BRUSHED STAINLESS STEEL	5001295
GAUGE, INTERIOR AMBIENT TEMP.		<input type="checkbox"/> CUSTOM COLOR	P155
<input type="checkbox"/> FULL-SERVICE CASES & SELF-SERVICE FULL CASES	5004182	<input type="checkbox"/> PAN INSERT, SELF-SERVICE 4" (102mm) DEEP	1001991
<input type="checkbox"/> SELF-SERVICE LEFT-SIDE OF CASES	5004183	PLATFORM SCALE	
<input type="checkbox"/> SELF-SERVICE RIGHT-SIDE OF CASES	5004184	<input type="checkbox"/> LEFT-HAND	5001308
<input type="checkbox"/> GLASS, TEMPERED END PANE, BRONZE KIT	5001143	<input type="checkbox"/> RIGHT-HAND	5001307
<input type="checkbox"/> INDEPENDENT ELECTRICAL OUTLET	5001781	SHEET PAN DIVIDER BAR PACKAGE	
PANEL KIT, COUNTER TOP		<input type="checkbox"/> FULL-SERVICE	5002803
<input type="checkbox"/> BRUSHED STAINLESS STEEL	5001282	<input type="checkbox"/> SELF-SERVICE LEFT-SIDE OR RIGHT-SIDE OF CASES	5002804
<input type="checkbox"/> CUSTOM COLOR	P152	<input type="checkbox"/> TEMPERATURE PROBE	5004917
		<input type="checkbox"/> THERMOSTAT GUARD COVER PLATE	5007660
		<input type="checkbox"/> WORK SHELF WITH GRAVY LANE	5005639

